

## Web Tension Transmitter



### FEATURES

- Ruggedized, field mounted web tension transmitter
- Integral multiple-transducer summing circuit
- Digital filtering dampens vibration without reducing response time
- 0-10V, 4-20mA, and RS-485 signal outputs
- 3½ digit front panel display with trailing zero
- NEMA 4/4X enclosure standard

### OPTIONAL FEATURE

- Modbus RTU or Allen-Bradley Remote I/O Interface

### DESCRIPTION


DXt-15 transmitters add high accuracy, 50,000 count resolution for web tension measurement systems. Precision tension measurement signals from LTT or HTZ transducers are measured, processed, and displayed on the front panel meter. Simultaneously, precise web tension signals are transmitted through the analog and serial outputs.

Digital filtering ensures stable display readings and smooth output signals for brake and motor drive controls. The DXt-15 contains an internal multi-cell summing circuit, 10 or 15 volt excitation, and digital RS-485 or Allen-Bradley Remote I/O outputs.

### APPLICATIONS

- Paper machines
- Converting equipment
- Roofing shingle machines

### CONFIGURATION

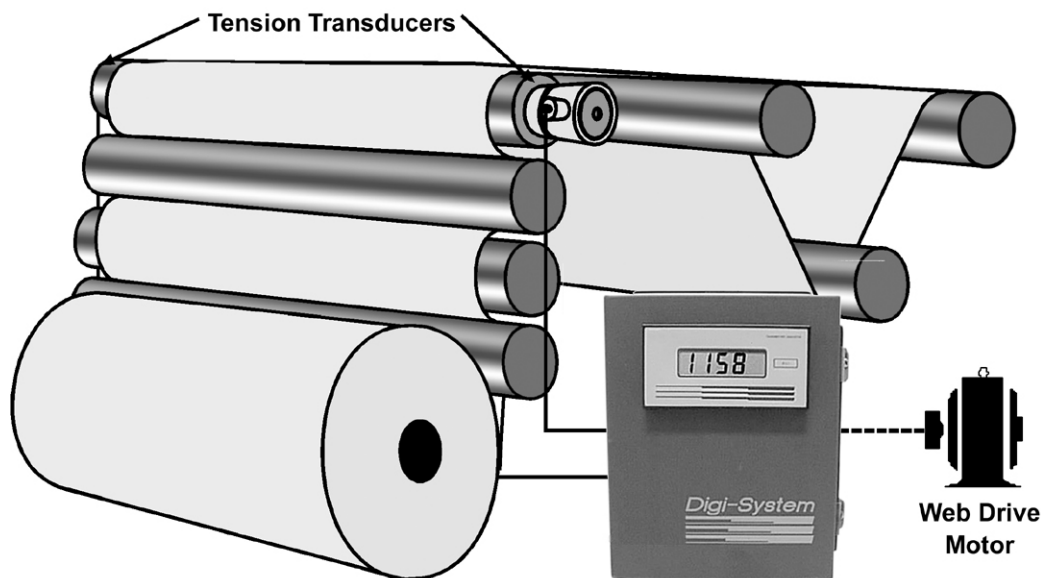

## SPECIFICATIONS

### Performance

Resolution	50,000 counts
Sensitivity	0.5 microvolt/count
Full Scale Range	25 or 35mV (selectable)
Dead Load Range	100%
Input Impedance	10 Mohms, min
Load Cell Excitation (Selectable)	10V for up to eight 350 ohm load cells (250mA) 15V for up to six 350 ohm load cells (260mA)
Linearity	±0.01% of full scale
Common Mode Rej.	100db or better at or below 35Hz
Conversion Speed	50msec

### Temperature Coefficient

Span	±2ppm/°C typical, 7ppm/°C max.
Zero	±2ppm/°C

### Environment

Operating Temperature	-10 to 55°C (12 to 131°F)
Storage Temperature	-20 to 85°C (-4 to 185°F)
Humidity	5 to 90% rh, non-condensing
Voltage	115/230 Vac ±15% 50/60 Hz
Power	10 watts max
Parameter Storage	EEPROM
EMI/RFI	shielded from typical industrial interference

### Display

Type	3 1/2 digit LCD with trailing zero characters are 0.7" tall
------	--

### Enclosure

Dimensions (NEMA 4/4X) 11.5x 8.0 x4.3 HxWxD

### Isolated Analog Output

Type	12 bit D/A conversion
Voltage	0 to 10 volt (25K ohm min load)
Current	4 to 20mA (1000 ohm max load)

### Serial Communication

#### Simplex Data Output (Standard)

Interface Type	RS-485 simplex ASCII data
Baud Rates	1200 or 9600
Data Format	7 data bits, even parity, 1 stop bit

#### Terminal/Computer Interface (Optional)

Interface Type	RS-485 half duplex (standard)
Baud Rates	1200 or 9600
Protocol	ASCII duplex command/ response
Format Format	7 data bits, even parity, 1 stop bit

#### Interface/Protocol Options

Allen Bradley	
Remote I/O	1/4 logical rack
Modbus	RTU protocol


#### Approvals

FM (Factory Mutual)	3611 (Class I, II, III; Div.1,2; Groups A-G)
CSA	C22.2 (Class I, II,III; Div.1,2; Groups A-G)

Allen-Bradley is a trademark of Rockwell Automation  
Modbus is a trademark of Schneider Automation.

BLH is continually seeking to improve product quality and  
performance. Specifications may change without notification.

**OUTLINE DIMENSIONS**

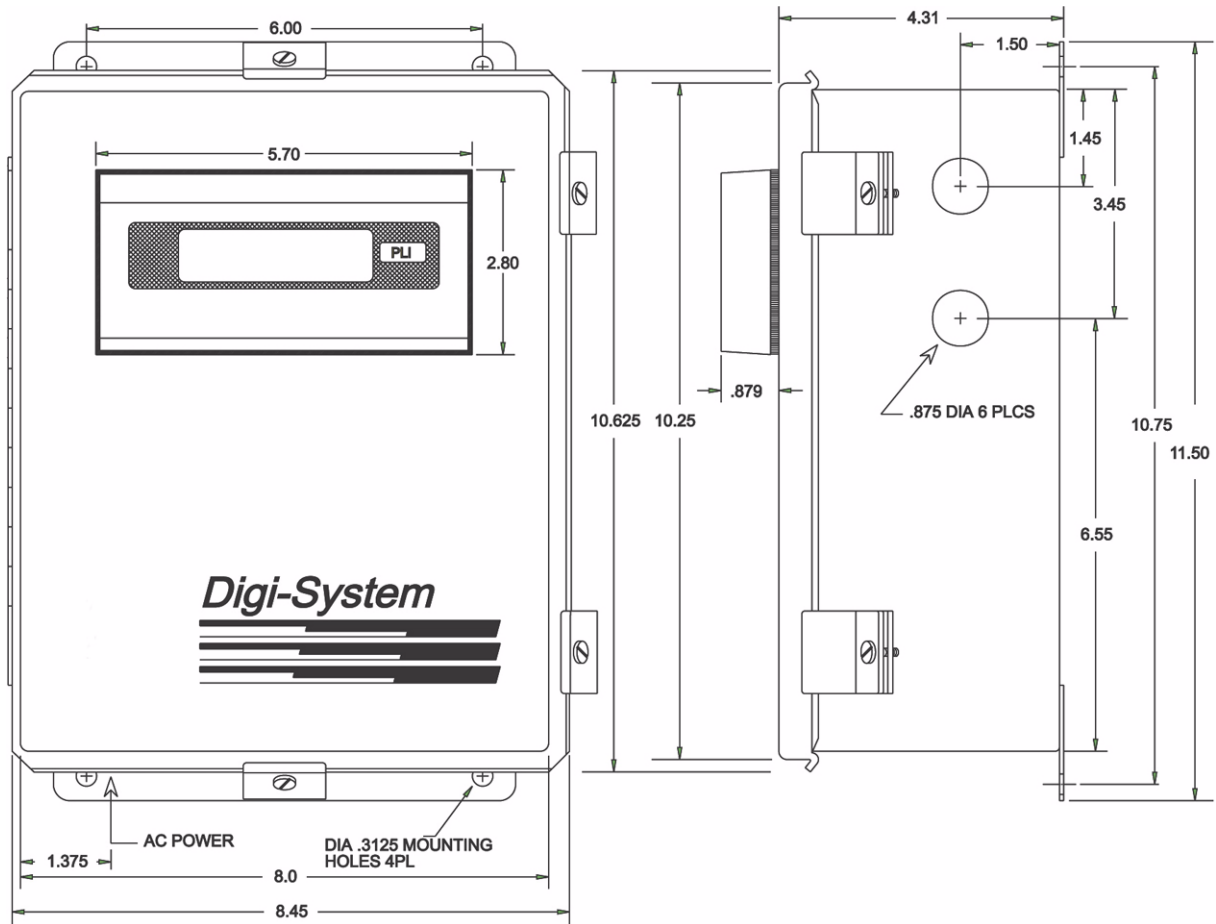



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.